


Equipment



This wind indicator has been designed for accuracy and durability and has been tested with extensive use. Ref 7201 has a reflective tape for better night vision. The universal base plate can be top or side mounted. The shaft will fit most other current model base plates with the adaptor supplied.

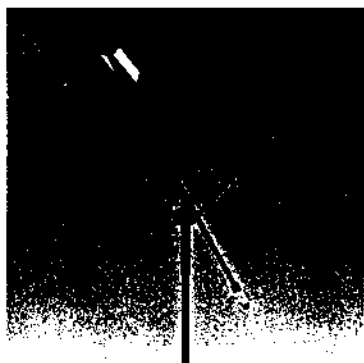

Wichard safety harness tethers are now available with the new double action hook. Its patented concept prevents any accidental opening of the hook. The elastic version retracts from 2 to 1 meter when not in use. This provides a great freedom of movement without dragging on the deck behind you. Wichard safety tethers comply with international norms for safety (EN 1095, US ORC).

Part number	Description
7550	Telescopic tiller extension, adjustable from 70 to 100 cm
7551	Telescopic tiller extension, adjustable from 80 to 120 cm
7510	Tiller extension length 70 cm - universal ball joint
7520	Tiller extension length 95 cm - universal ball joint
7530	Tiller extension length 120 cm - universal ball joint
7515	Tiller extension length 70 cm - removable universal joint
7525	Tiller extension length 95 cm - removable universal joint
7535	Tiller extension length 120 cm - removable universal joint
7500	Retaining clip (20 mm Dia)
7201	Wind indicator length 38 cm
7202	Wind indicator length 25 cm

Part number	Description
7005	Elastic harness tether. Retracts from 2 to 1 meter, break load 2080kg, with two double action safety hooks.
7001	Same with two stainless steel carabine hooks.
7006	Elastic harness tether. 1 m fixed line, the other retracts from 2 to 1 meter, break load 2080kg, with three double action safety hooks.
7002	Same with three stainless steel carabine hooks.
7015	Elastic harness tether. 2 meters long, break load 2080kg, with two double action safety hooks.
7011	Same, break load 2080 kg, two stainless steel carabine hooks.
7021	Same, break load 1500 kg, two stainless steel carabine hooks.

◆ new products

